




SAFETY-RELIEF VALVE

MODEL 4400

(SERIES 441,442 & 443)

FOR AIR AND GAS SERVICE
AT 10% OVERPRESSURE

SEE PAGE 60 FOR LIFTING DEVICES.

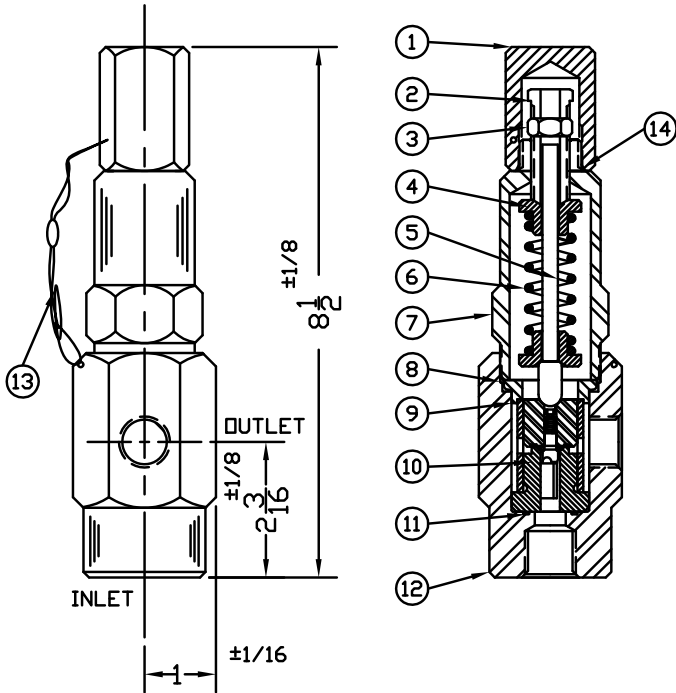

THREAD CONNECTIONS

ORIFICE SIZE	INLET	OUTLET
.187	1/4,3/8,1/2 FNPT	1/4,3/8,1/2 FNPT
	1/4,3/8,9/16 AMINCO	
	MS33649-4,6,8,12	
.250	1/4,3/8,1/2 FNPT	1/4,3/8,1/2 FNPT
	1/4,3/8,9/16 AMINCO	
	MS33649-4,6,8,12	
.312	3/8,1/2 FNPT	3/8,1/2 FNPT
	3/8,9/16 AMINCO	
	MS33649-4,6,8,12	


SEE PAGE 53 & 54 FOR CAPACITY CHARTS.

SERIES NO. §	ORIFICE SIZE	SEAT MATERIAL	SET PRESSURE RANGE
441	.187	PLASTIC ONLY	50 - 16,000
442	.250	PLASTIC ONLY	50 - 13,200
443	.312	PLASTIC ONLY	50 - 9,200

§ SEE PAGE 91 & 92 FOR PART NUMBERING SYSTEM.

SUGGESTED SEAT MATERIAL

SET PRESSURE	SEAT MATERIAL
50 - 3,000	TEFLON †
3,000 - 5,000	KEL-F †
5,000 - 16,000	VESPEL †

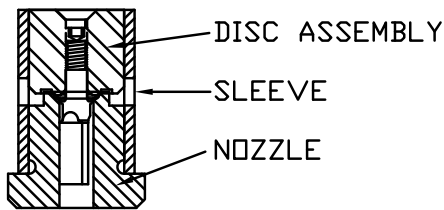

INNER VALVE UNIT DETAIL

† TEMPERATURE RANGE: TEFLON : -450°F TO 500°F
KEL-F : -400°F TO 400°F
VESPEL : -420°F TO 500°F

WEIGHT IS APPROX. 5#
† OTHER SPRING MATERIALS UPON REQUEST.

ITEM NO.	PART NAME	303 S/S MATERIAL CLASS	316 S/S MATERIAL CLASS
1	HOOD	ASTM A582,TYPE 303	ASTM A479,TYPE 316
2	PRESSURE SCREW	ASTM A582,TYPE 303	ASTM A479,TYPE 316
3	LOCKNUT	ASTM A582,TYPE 303	ASTM A479,TYPE 316
4	SPRING PLATES (2)	ASTM A582,TYPE 303	ASTM A479,TYPE 316
5	SPRING POST	ASTM A582,TYPE 303	ASTM A479,TYPE 316
6	SPRING	ASTM A313,TYPE 316	ASTM A313,TYPE 316
7	BONNET	ASTM A582,TYPE 303	ASTM A479,TYPE 316
8	BODY SEAL	TEFLON,BUNA-N,VITON	TEFLON,BUNA-N,VITON
9	RETAINER RING	ASTM A582,TYPE 303	ASTM A479,TYPE 316
10	INNER VALVE UNIT	ASTM A582,TYPE 303	ASTM A479,TYPE 316
11	NOZZLE SEAL	TEFLON,BUNA-N,VITON	TEFLON,BUNA-N,VITON
12	BODY	ASTM A582,TYPE 303	ASTM A479,TYPE 316
13	SEAL & WIRE	LEAD SEAL/S/S WIRE	LEAD SEAL/S/S WIRE
14	HOOD SEAL	TEFLON,BUNA-N,VITON	TEFLON,BUNA-N,VITON