



SAFETY-RELIEF VALVE MODEL 1500

(SERIES 1546, 1547 & 1548)

*ASME
UV CODED

NATIONAL BOARDED

*ASME UV CODED PER SEC. VIII DIV. I
AIR & GAS SERVICE (PLASTIC SEATS ONLY)

AIR SERVICE MUST HAVE LIFT LEVER
SEE PAGE 60 FOR LIFTING DEVICES

THREAD CONNECTIONS

*ORIFICE SIZE	INLET	OUTLET
.800, *	2, 2½, 3" FNPT	2½, 3" FNPT
1.000 * & 1.281 *	2, 2½, 3" MNPT MS33656-24,32	

SEE PAGE 23 & 24 FOR CAPACITY CHART

§ SEE PAGE 89 & 90 FOR PART NUMBERING SYSTEM.



SERIES NO. §	ORIFICE SIZE	SEAT MATERIAL	SET PRESSURE RANGE
*1546	.800	PLASTIC ONLY	40 - 3,800
*1547	1.000	PLASTIC ONLY	40 - 3,000
*1548	1.281	PLASTIC ONLY	40 - 1,100

SUGGESTED SEAT MATERIAL


SET PRESSURE	SEAT MATERIAL
40 - 3,000	TEFLON †
3,000 - 3,800	KEL-F †

† OTHER SPRING MATERIALS
AVAILABLE UPON REQUEST.

† USE RETAINER & RETAINER
SEAL FOR THESE INNER
VALVE UNITS ONLY.

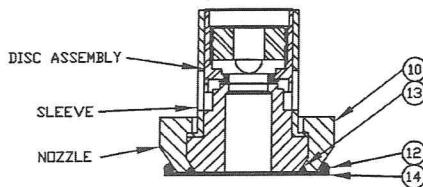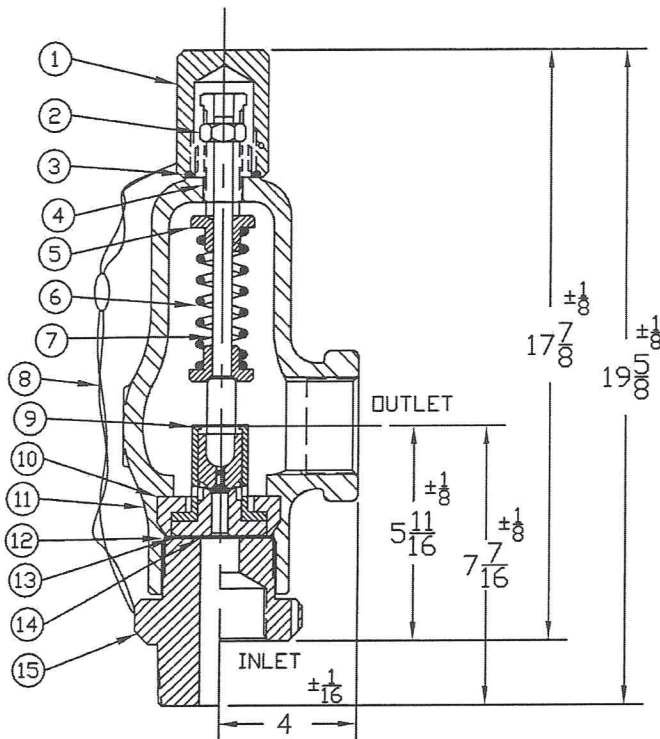

INNER VALVE UNIT
WITH RETAINER RING
(.800 & 1.000)



INNER VALVE UNIT
(1.281)

† TEMPERATURE RANGE
TEFLON † : -450°F TO 500°F
KEL-F † : -400°F TO 400°F

WEIGHT IS APPROX. 45#

ITEM NO.	PART NAME	316 S/S MATERIAL CLASS	CARBON STEEL MATERIAL CLASS
1	HOOD	ASTM A479, TYPE 316	ASME SA29, TYPE 12L14
2	LOCKNUT	ASTM A479, TYPE 316	ASTM A582, TYPE 303
3	HOOD SEAL	TEFLON, BUNA-N, VITON	TEFLON, BUNA-N, VITON
4	PRESSURE SCREW	ASTM A479, TYPE 316	ASTM A582, TYPE 303
5	SPRING PLATES	ASTM A479, TYPE 316	ASTM A582, TYPE 303
6	SPRING	ASTM A313, TYPE 17/7	ASTM A313, TYPE 17/7
7	SPRING POST	ASTM A479, TYPE 316	ASTM A582, TYPE 303
8	SEAL & WIRE	LEAD SEAL/S/S WIRE	LEAD SEAL/S/S WIRE
9	INNER VALVE UNIT	ASTM A479, TYPE 316	ASTM A479, TYPE 316
10	RETAINER	ASTM A479, TYPE 316	ASTM A582, TYPE 303
11	BONNET	ASME SA351, TYPE CF8M	ASME SA216, TYPE WCB
12	BODY SEAL	TEFLON, BUNA-N, VITON	TEFLON, BUNA-N, VITON
13	RETAINER SEAL	TEFLON, BUNA-N, VITON	TEFLON, BUNA-N, VITON
14	GASKET	TEFLON	TEFLON
15	BODY	ASTM A479, TYPE 316	ASME SA29, TYPE 1018