




INLINE CHECK VALVE PART NUMBERING SYSTEM

MODEL 2000-2100-2200-2300-5300-5400

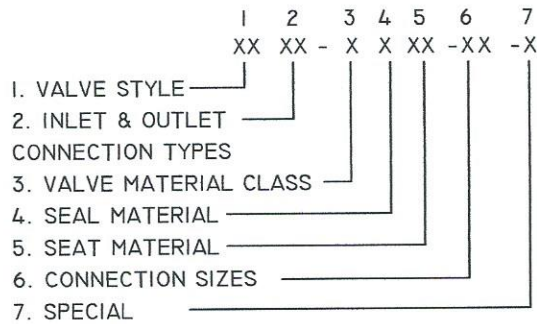

(EXAMPLE OF ORDERING INFORMATION:
2001-231-16 3 PSIG MAX. CRACK)

I. VALVE STYLE

MODEL NO	CONNECTIONS	WOG (PSIG)	BURST (PSIG)
20	MS, NPT, GRAYLOC	3,000	12,000
20	MS, NPT, GRAYLOC	100	400
21	MS, NPT, GRAYLOC	6,000	24,000
22	MS, NPT, GRAYLOC	10,000	40,000
23	CONSULT FACTORY	15,000	60,000
53	1/4, 3/8, 9/16 AMINCO	15,000	60,000
54	MS, NPT, GRAYLOC & AMINCO UP TO 3/4"	10,000	40,000
54	MS, NPT, GRAYLOC 1" AND ABOVE	2,000	8,000

(ELASTOMER SEATS ONLY)

2. INLET & OUTLET CONNECTION TYPES

NO.	CONNECTION TYPES
00	MNPT
01	FNPT
02	MS33649(AS5202)
03	MS33656
04	AMINCO
05	GRAYLOC
06	R.F. FLANGE (SANDWICH TYPE)
07	MS33656 x MS33649(AS5202)
08	SOCKET WELD
09	MS33649(AS5202) x MS33656
10	MNPT x FNPT
11	R.T.J. FLANGE (SANDWICH TYPE)
12	SPECIAL (2-5/8" x 3/4")
13	FNPT x MNPT
14	MS33656 x MNPT
15	MC240
16	AUTOCLAVE
17	BUTTWELD
18	SOCKET WELD x FNPT
19	UNION BUTTWELD TYPE
20	MS16142
21	UNION

NO.	CONNECTION TYPES
22	GRAYLOC x 2-I502 F
23	2-I502 M x FNPT
24	LPT (LINE PIPE THREAD)
25	MNPT x MS33656
26	KCI05(ASI098E)
27	I502 M x I502 F
28	I502 F x I502 M
29	1 MP AUTOCLAVE x 1"-I502F
30	BSPP
31	MP AUTOCLAVE x 1-1/2" I502 M WING
32	GRAYLOC x I502F



INLINE CHECK VALVE PART NUMBERING SYSTEM MODEL 2000-2100-2200-5300-5400

3. VALVE MATERIAL CLASS

NO.	MATERIAL CLASS
1	300 S/S
2	316 S/S
3	304 S/S
4	MONEL
5	CARBON STEEL
6	CARPENTER 20
7	BRASS
8	HASTALLOY

6. CONNECTION SIZES

NO.	MS	GRAYLOC	NPT	AUTOCLAVE
04	1/4		1/8	
05	5/16		1/4	1/4
06	3/8		3/8	
08	1/2		1/2	
12	3/4	1/2 OR 3/4	3/4	9/16 OR 3/4
16	1"	1"	1"	1"
20	1-1/4	1-1/4, 1-1/2	1-1/4	
24	1-1/2	1-1/2, 2"	1-1/2, 2"	
32	2"	2-1/2, 3"	2-1/2, 3"	
48		4"	4"	

4. SEAL MATERIAL

NO.	MATERIAL
1	BUNA-N
2	VITON
3	TEFLON
4	METAL
5	ETHYLENE PROPYLENE
6	KEL-F
7	SP-2II
8	OMNI

5300 MODEL ONLY!

NO.	AMINCO ONLY
01	1/4
02	9/16
03	3/8

5. SEAT MATERIAL CLASS

NO.	MATERIAL
0	COPPER
1	TEFLON
2	KEL-F
3	METAL
4	VESPEL SP-2I
5	VESPEL SP-I
6	NYLON
7	VITON (LOW PRESS. ONLY)
8	KALREZ (LOW PRESS. ONLY)
9	EPR (LOW PRESS. ONLY)
10	BUNA-N (LOW PRESS. ONLY)
11	PEEK 450G

7. SPECIAL

NO.	DESCRIPTION
	LEAVE BLANK IF STANDARD 3 PSIG MAX CRACK SPRING IS REQUIRED. IF DIFFERENT CRACK IS NEEDED, ADD THE PSIG AMOUNT.
S=	SPECIAL MODIFIED SEE PAGE 95,96 & 97 FOR CODES